

Affinity® Thermal Control Products from Lydall

Lydall Affinity® thermal control solutions are designed and built to your manufacturing specifications and are focused on reducing energy consumption. High-performance refrigerated and non-refrigerated chillers and heating systems in compact, modular and user-friendly designs, deliver process temperature ranges of -80°C to +200°C.

Innovative, modular design.

Reliable performance.

Flexible applications.

P-Series *Air-Cooled Chiller*

System Features:

- No facility water hook-up required
- Easy to install (Plug & Play)

Available Options:

- Air-cooled or water-cooled heat rejection
- Alternative coolant temperature ranges
- Many electrical configurations
- Various pumps available
- Open reservoir system
- RS-485 & RS-232 communications
- WinChill Control Software
- Various interlocks for flow, level, temp, etc. Choice of DB-25 or 4-pin configurations
- Internal or external coolant loop deionizing cartridges & sensors
- Coolant loop filter packages
- Stainless, engineered plastics, nickel only on wetted surfaces
- Adjustable low flow switch
- Quick connect external hose packages

Not all options available on all models.

Reservoir Fill

Coolant Pressure Gauge

Power Switch

Process Temperature Controller, Warnings/Alarms

Digital Controller

Removable, Cleanable Air Filter

4 Swivel Casters (2 Locking)

1/2" NPT Coolant Supply & Return Lines out back panel



Now you have a choice.

System Performance Characteristics


Model Nomenclature	PAA-007T-CE77CBD3
MET Listed	Yes
CE Marked	Yes
Weight	185 lbs
Dimensions	22.5"L x 14.5"W x 24.5"H
Ambient Temperature Range	41° F - 95° F (5° C - 35° C)
Process Temperature Range	39° F - 86° F (4° C - 30° C)
Nominal Heat Removal	2.5 kW @ 68° F (20° C)
Pump Performance @ 60 Hz	4 gpm @ 50 psi
Electrical Configuration:	
Voltage @ 60 Hz	208-230 Volts +/- 10%
Voltage @ 50 Hz	200 Volts +/- 10%
Phase	1
Total Amps	12
Maximum Fuse Disconnect (required of customer)	15
Power Cord Supplied	Nema, 6-15
Refrigerant	R-134a

Notes:

Data @ 30°C/86°F unrestricted ambient air for air-cooled chillers.
Capacities decrease with increasing ambient temperature.


Cooling Capacity

KiloWatts vs. Process Temperature

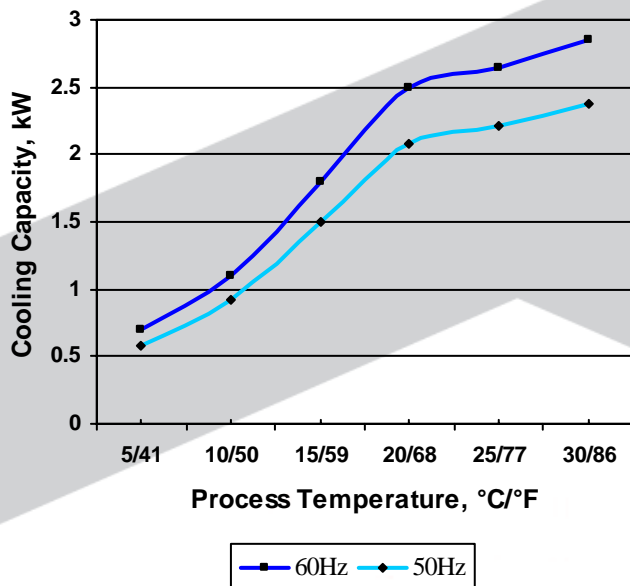

Pump Performance @ 60 Hz

Coolant pressure versus flow rate

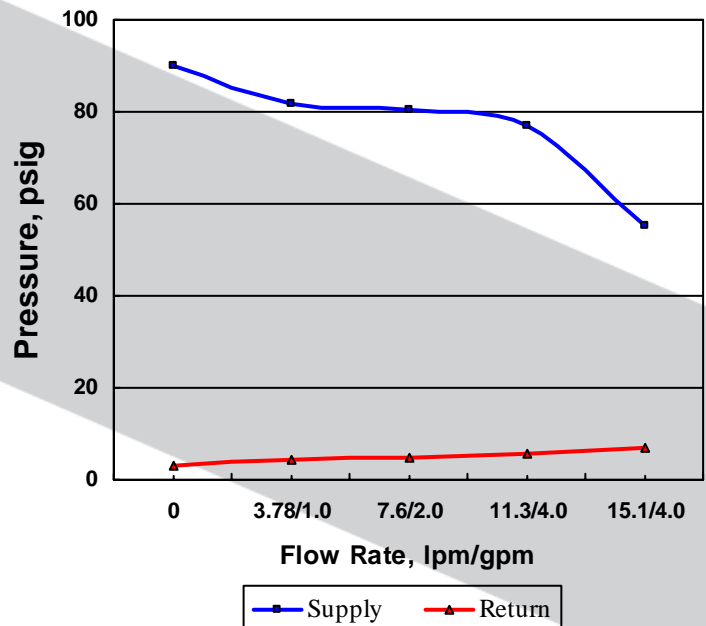

Now you have a choice.