

Affinity® Thermal Control Products from Lydall

Lydall Affinity® thermal control solutions are designed and built to your manufacturing specifications and are focused on reducing energy consumption. High-performance refrigerated and non-refrigerated chillers and heating systems in compact, modular and user-friendly designs, deliver process temperature ranges of -80°C to +200°C.

Innovative, modular design.

Reliable performance.

Flexible applications.

R-Series *Air-Cooled Chiller*

System Features:

- No facility water hook-up required
- Easy to install (Plug & Play)


Available Options:

- Air-cooled or water-cooled heat rejection
- Alternative coolant temperature ranges
- Many electrical configurations
- Various pumps available
- Open reservoir system
- RS-485 & RS-232 communications
- WinChill Control Software
- Various interlocks for flow, level, temp, etc.
- Choice of DB-25 or 4-pin configurations
- Internal or external coolant loop deionizing cartridges & sensors
- Coolant loop filter packages
- Stainless, engineered plastics, nickel only on wetted surfaces
- Adjustable low flow switch
- Quick connect external hose packages

Not all options available on all models.



Now you have a choice.

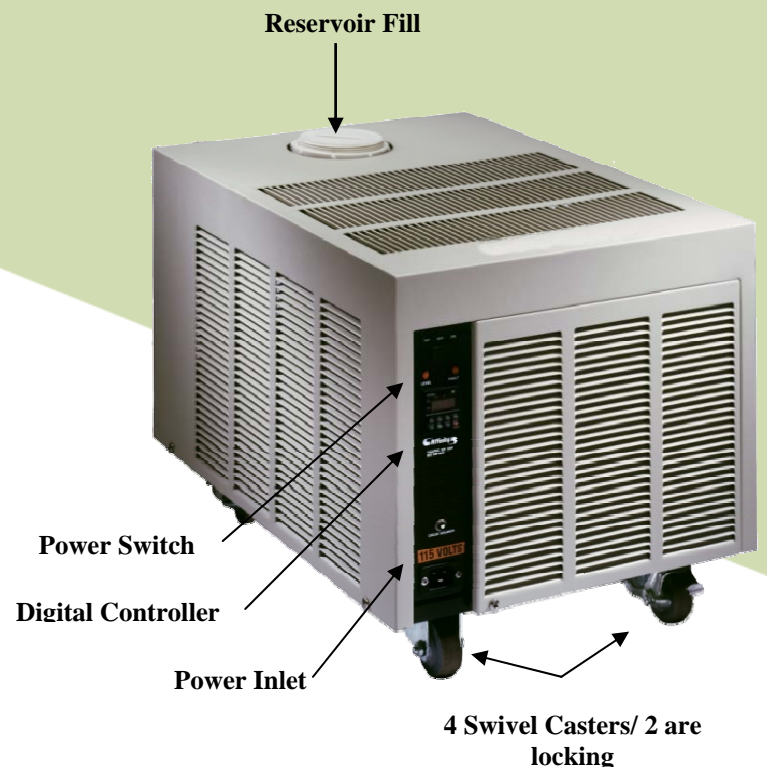

www.lydallaffinity.com

System Performance Characteristics


| | |
|---|---------------------------------|
| Model Nomenclature | RAA-007T-CD19CBD3 |
| CE Marked | Yes |
| MET Listed | Yes |
| Weight | 215 |
| Dimensions | 27"L x 19"W x 18"H |
| Ambient Temperature Range | 41° F - 95° F (5° C - 35° C) |
| Process Temperature Range | 39° F - 86° F (4° C - 30° C) |
| Nominal Heat Removal | 2.5 kW |
| Pump Performance @ 60 Hz | 4 gpm @ 40 psi |
| Electrical Configuration: | |
| Voltage @ 60 Hz | 208 – 230 Volts +/- 10% |
| Voltage @ 50 Hz | 200 Volts +/- 10% |
| Phase | 1 |
| Total Amps | 11.4 |
| Maximum Fuse Disconnect (required of customer) | 20 |
| Power Cord Supplied | Nema, 6-20 |
| Refrigerant | R-134a |

Notes:

Data @ 30°C/86°F unrestricted ambient air for air-cooled chillers.
Capacities decrease with increasing ambient temperature.


Cooling Capacity

KiloWatts vs. Process Temperature

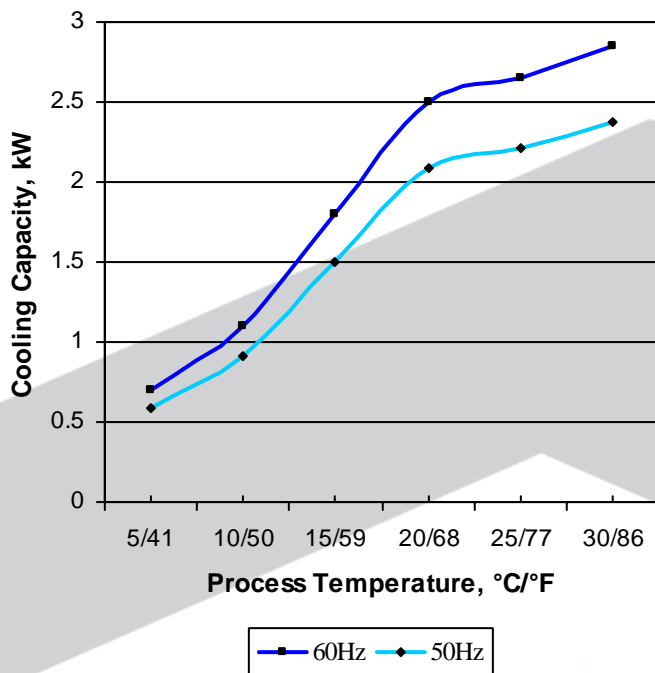

Pump Performance

Coolant pressure versus flow rate

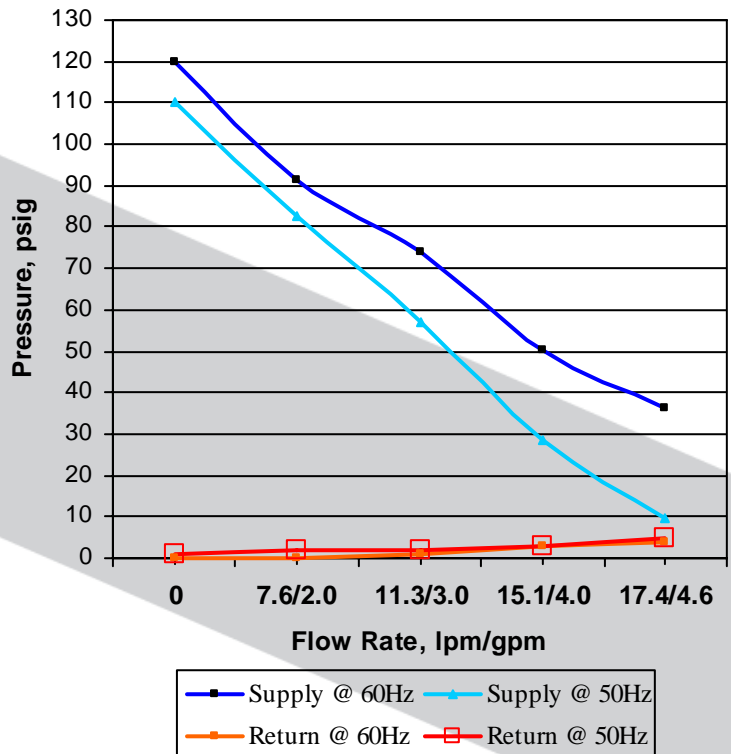

Now you have a choice.